


ORDERING GUIDE

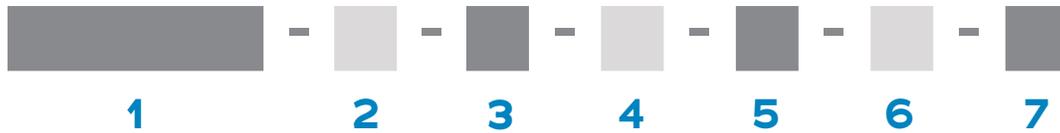

1 Series	MNPO Metal Nano Pin Offset	MNSO Metal Nano Socket Offset
2 Number Of Contacts	09 15 21 25 31 37 51 65 69 85 91	
3 Termination Type	AA Horizontal Surface Mount	
4 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized T Titanium Shell, Unplated	CD Aluminium shell, Cadmium Plated S Stainless Steel Shell, Passivated
5 Common Options	ETH End Threaded Hole, #0-80 NTH Non-Threaded Holes For Mounting To The Board YY Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) HT High Temp. Epoxy CS Customer Supplied Material	EJS End Jack Screw RH RoHS Compliant
6 Mod Codes	M10 Keyed M50 Space Grade Nano-D, SPT1	M30 Ground Spring M53 Space Grade Nano-D, SPT2
7 Special Instructions	YYY Describe anything that is not covered in standard options	

DUAL ROW HORIZONTAL SMT (TYPE AA)

Horizontal SMT Bi-Lobe® extremely low-profile connectors are well-suited for pick and place mounting methods. SMT Bi-Lobe® nano connectors feature Omnetics' highly reliable gold-plated Flex Pin contact system. In addition to ease of assembly, their lightweight construction helps meet size and weight goals. They are rugged and deliver high performance under shock, vibration, temperature extremes, and other rigorous conditions common to critical applications. Omnetics' SMT Bi-Lobe® nano connectors are available in a range of options, including mounting holes suitable for PCB and flex mounting. They are available in standard sizes ranging from 9 through 91 positions, as well as custom configurations.



Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	Thermoplastic per MIL-M-24519
Encapsulant	Epoxy



Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

DUAL ROW HORIZONTAL SMT (TYPE AA)

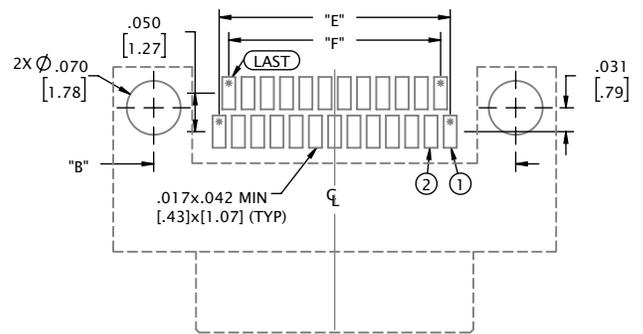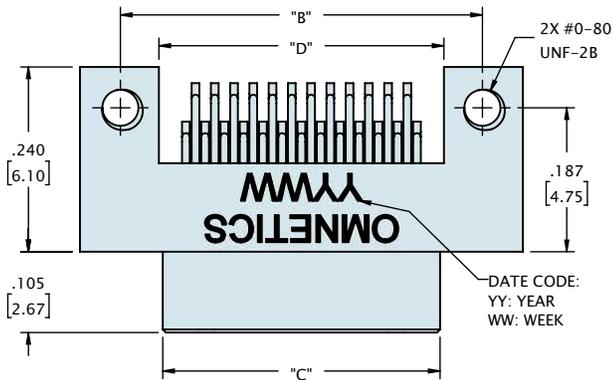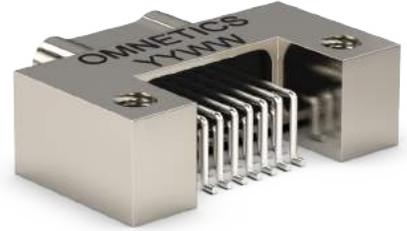



SUGGESTED PAD LAYOUT
(VIEW FROM MOUNTING SIDE OF BOARD)

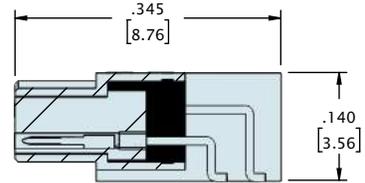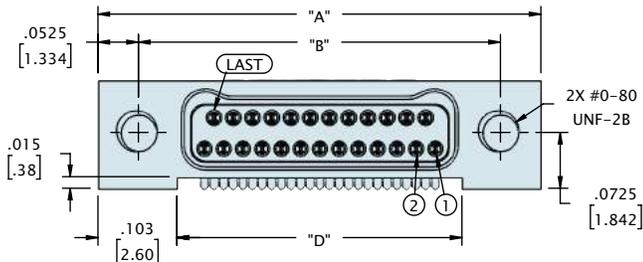



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.90]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]	.175 [4.44]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.71]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]	.300 [7.62]	.275 [6.98]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.375 [9.52]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.79]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.625 [15.87]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.68]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]	.920 [23.37]	.850 [21.59]	.825 [20.95]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]	1.050 [26.67]	1.025 [26.03]
91	1.452 [36.88]	1.321 [33.55]	1.185 [30.10]	1.195 [30.35]	1.125 [28.57]	1.100 [27.94]

DIMENSIONS IN [] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

DUAL ROW HORIZONTAL SMT (TYPE AA)

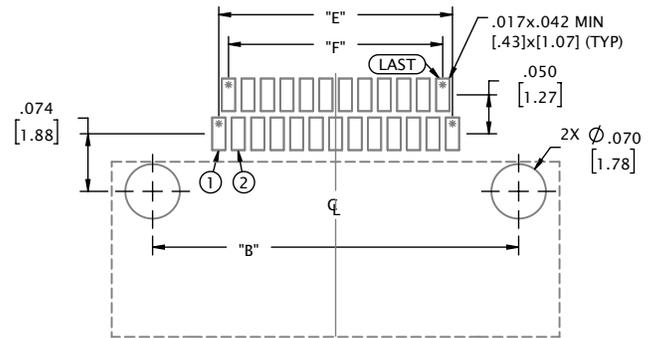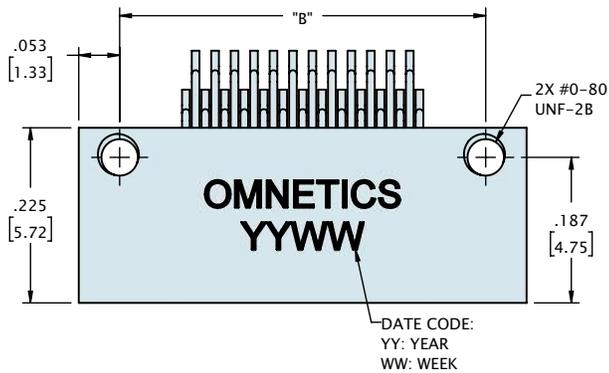

SUGGESTED PAD LAYOUT
(VIEW FROM MOUNTING SIDE OF BOARD)

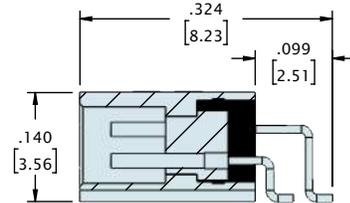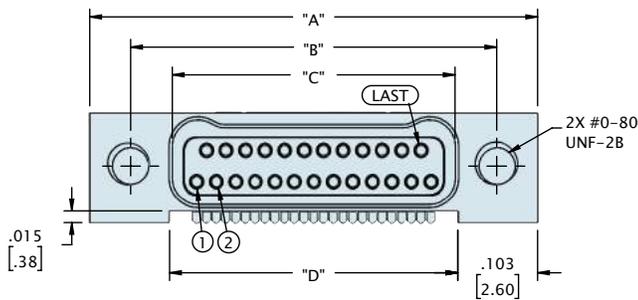

CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.175 [4.45]	.150 [3.81]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]	.920 [23.37]	.850 [21.59]	.825 [20.96]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]	1.195 [30.35]	1.125 [28.58]	1.100 [27.94]

DIMENSIONS IN [] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY